

Modified asymmetrically-clipped optical orthogonal frequency-division multiplexing system performance

Mohamed, Salma D.; Andonovic, Ivan; Shalaby, Hossam; Aly, Moustafa H.

Published in:
2013 IEEE Photonics Conference

DOI:
[10.1109/IPCon.2013.6656550](https://doi.org/10.1109/IPCon.2013.6656550)

Publication date:
2013

Document Version
Author accepted manuscript

[Link to publication in ResearchOnline](#)

Citation for published version (Harvard):
Mohamed, SD, Andonovic, I, Shalaby, H & Aly, MH 2013, Modified asymmetrically-clipped optical orthogonal frequency-division multiplexing system performance. in *2013 IEEE Photonics Conference*. IEEE.
<https://doi.org/10.1109/IPCon.2013.6656550>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

If you believe that this document breaches copyright please view our takedown policy at <https://edshare.gcu.ac.uk/id/eprint/5179> for details of how to contact us.

Modified Asymmetrically-Clipped Optical Orthogonal Frequency-Division Multiplexing System Performance

Salma D. Mohamed, Ivan
Andonovic

Department of Electronics and Electrical
Engineering,
Strathclyde University
Glasgow, Scotland.
salma.mohamed@strath.ac.uk

Hossam Shalaby

Department of Electronics and
Communications Engineering,
Egypt-Japan University of Science and
Technology, Alexandria, Egypt, on leave from
Electrical Engineering Department,
Alexandria University, Alexandria, Egypt.

Moustafa H. Aly

College of Engineering, Arab Academy for
Science and Technology, Alexandria,
Egypt.

Abstract— Improvement in bit error rate performance of asymmetrically-clipped optical orthogonal frequency-division multiplexing (ACO-OFDM) is achieved through proposed modification by using unipolar encoding. This modification eliminates the 3 dB difference between ACO-OFDM performance and bipolar OFDM.

Keywords— *asymmetrically-clipped optical orthogonal frequency-division multiplexing (ACO-OFDM); bit error rate (BER).*

I. INTRODUCTION

In spite of the widespread use of Orthogonal Frequency Division Multiplexing (OFDM) in wireless communications, it has only recently been proposed for use in optical communications [1] principally gated by developments in digital signal processing which have enabled the effective management of optical fiber transmission impairments such as dispersion [1]. Since intensity modulation and direct detection implementations represent the predominant deployments and due to the fact that the OFDM signal is complex, several techniques have been used to convert an OFDM signal into a real, positive domain that then lends itself to direct modulation of the optical source. In order to make the signal truly positive, a number of techniques have been proposed. DC-biased optical OFDM (DCO-OFDM) [2]-[5], asymmetrically-clipped optical OFDM (ACO-OFDM) [2]-[5], and unipolar OFDM (U-OFDM) [5]. In all, Hermitian symmetry is employed such that the output of the IFFT block is real but here a modification to ACO-OFDM is adopted to yield unipolar time encoding instead of zero clipping. Each sample is expressed as a new pair of samples, decreasing the effect of noise on system performance.

II. SYSTEM MODEL

The input bits at the transmitter are first mapped to complex M-QAM symbols $A(l)$. These symbols are then input to the IFFT block, the output being complex and bipolar. However as the implementation is founded on intensity modulation, the time domain signal has to be real and positive; the ACO-OFDM technique is employed to achieve this [3]-[5]. For an IFFT/FFT of size N , the OFDM frame has N subcarriers, so

the signal is defined by $A_{frame}(m)$, $m=0,1,2,3,\dots,N-1$. In the case of ACO-OFDM, data is only mapped on the odd subcarriers, the even subcarriers being set to zero. Thus only $N/4$ symbols of $A(l)$, $l=0,1,2,3,\dots,N/4-1$ are mapped onto half of the odd subcarriers, $A_{frame}(m)$, $m=1,3,5,\dots,N/2-1$. Hermitian symmetry with $A_m=A_{N-m}$ and $A_0=A_{N/2}=0$ [2]-[5] is then imposed on the other half of the sub-carriers to ensure that the output of the IFFT is real. The ACO-OFDM signal is then passed through the IFFT block, the output time domain signal of the IFFT, $x(n)$ being real but bipolar. This time domain signal is anti-symmetric around the element $N/2$ (Fig. 1) [4]. In conventional ACO-OFDM, the bipolar real time domain signal $x(n)$ is clipped at the zero level to ensure that the signal is positive; in the proposed system, the unipolar encoding technique suggested by *Dobroslov et al.* [5] is used. The unipolar encoding represents each sample of the bipolar time domain signal by a pair of new time samples. If the time sample is positive then the first sample of the new pair is set with its amplitude, and the second sample of the new pair is set to zero. If the original time domain sample is negative, then the first sample of the new pair is set to zero and the second sample of the new pair is set with its positive amplitude (Fig. 2). The optical source is intensity modulated by the modified ACO-OFDM signal $x_{modified_ACO}(n)$ and transmitted through the optical channel subject to AWGN.

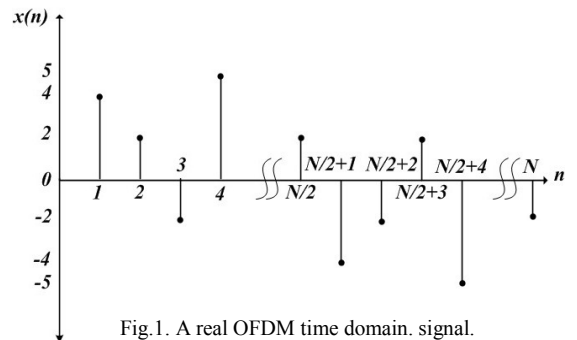


Fig.1. A real OFDM time domain. signal.

III. SIMULATION RESULTS

Fig. 3 compares the BER performance of the proposed modified ACO-OFDM and conventional ACO-OFDM.

